iBR

TECHNICAL TRADING AFRICA



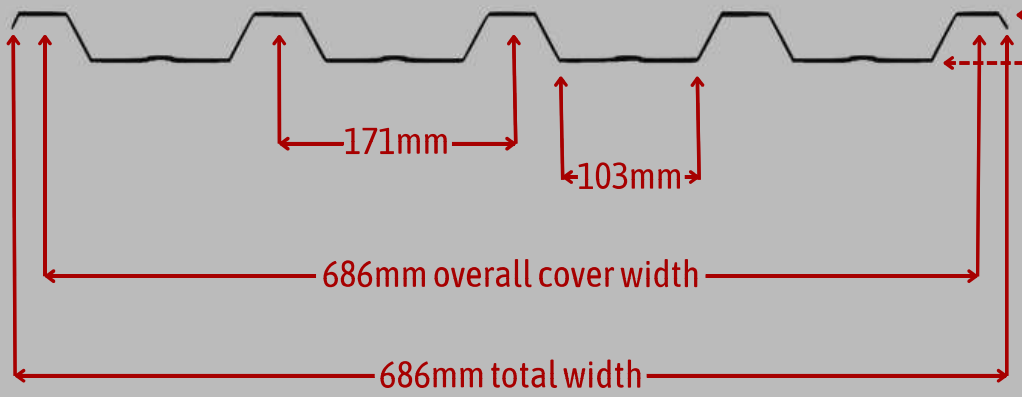

*When using **IBR** sheeting, the recommended minimum pitch, for roof slopes in excess of 15 metres, is 7.5° and for slopes less than 15 metres, is 5°.*

PURLIN SPACING CHART

GAUGE	0.47mm	0.53mm	0.80mm	0.80mm
Material	Aluminium-Zinc Magnesium Coated	Aluminium-Zinc Magnesium Coated	Aluminium-Zinc Magnesium Coated	Aluminium
ROOFS				
Single Span	1300mm	1500mm	1900mm	1200
End Span	1600mm	1800mm	2200mm	1500
Internal Span	1900mm	2100mm	2500mm	1800
Cantilever	200mm	250mm	400mm	200
SIDE CLADDING				
End Span	1700mm	2100mm	2600	1500
Internal Span	2100	2500	3000	1900
Cantilever	300	400	350	300
Approximate Mass	4.8kg	5.42kg	8.18kg	3.02kg