Widespan

TECHNICAL TRADING AFRICA

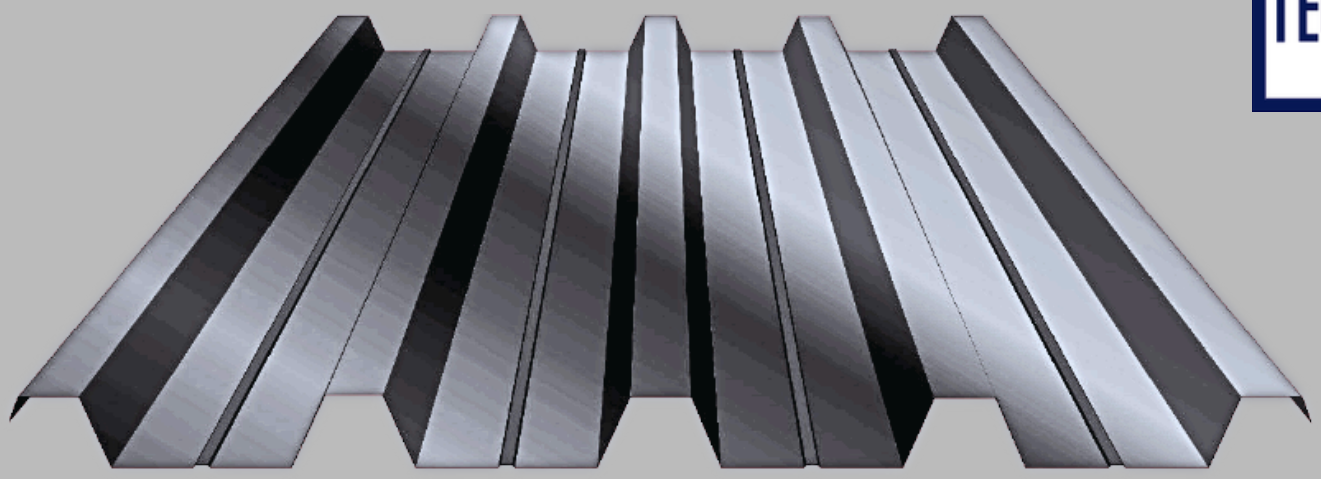

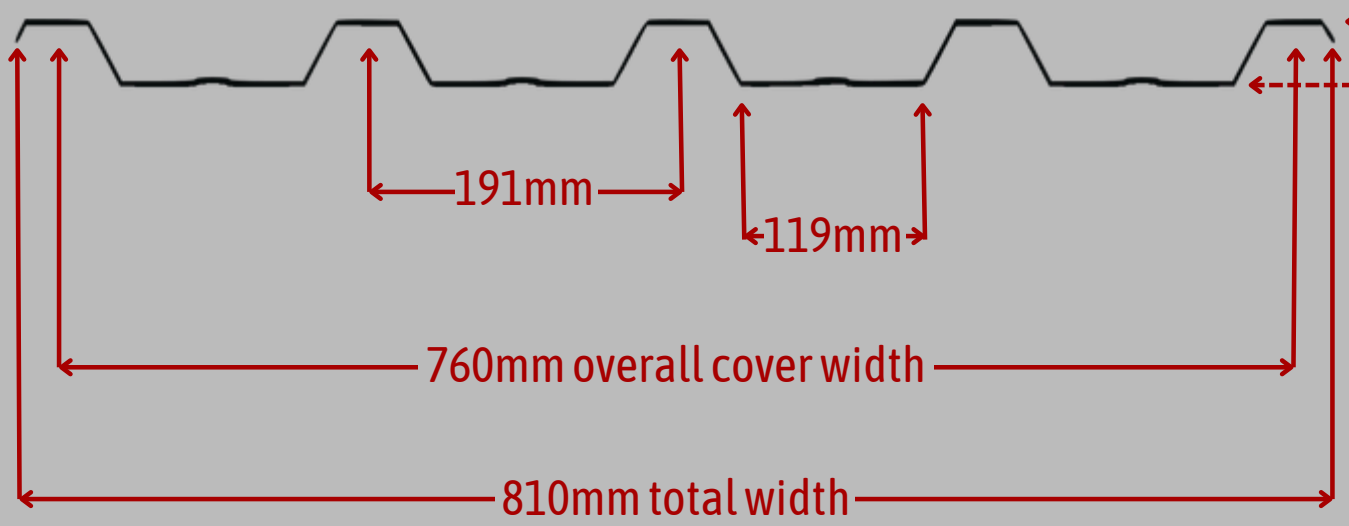

*When using **Widespan** sheeting, the recommended minimum pitch, for roof slopes in excess of 15 metres, is 10° and for slopes less than 15 metres , is 7.5°.*

PURLIN SPACING CHART

GAUGE	0.47mm	0.53mm	0.80mm	0.80mm
Material	Aluminium-Zinc Magnesium Coated	Aluminium-Zinc Magnesium Coated	Aluminium-Zinc Magnesium Coated	Aluminium
ROOFS				
Single Span	1200mm	1400mm	1700mm	1000mm
End Span	1400mm	1600mm	1900mm	1200mm
Internal Span	1600mm	1800mm	2100mm	1400mm
Cantilever	150mm	200mm	400mm	150mm
SIDE CLADDING				
End Span	1700mm	2100mm	2500mm	1300mm
Internal Span	2000mm	2400mm	2800mm	1600mm
Cantilever	200mm	300mm	450mm	300mm
Approximate Mass	4.34kg	4.89kg	7.38kg	2.73kg